

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Extension of OFDMA Physical layer mode to support 256 & 1024 point QAM constellations for high capacity back-haul applications	
Date Submitted	2013-03-19	
Source(s)	David Castelow, Andrew Logothetis and Marlon Persaud Airspan Communications Ltd Capital Point, 33 Bath Road Slough, SL1 3UF, UK	Voice: +44 1895 467281 E-mail: dcastelow at airspan.com * http://standards.ieee.org/faqs/affiliationFAQ.html >
Re:	IEEE 802.16-13-0032-01-Gdoc	
Abstract	Changes required to extend 802.16 OFDMA physical layer in order to support 256-QAM and 1024-QAM constellations, along with necessary extensions to the block sizes and control codes.	
Purpose	For acceptance as part of the 802.16r amendment.	
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>	
Copyright Policy	The contributor is familiar with the IEEE-SA Copyright Policy < http://standards.ieee.org/IPR/copyrightpolicy.html >.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < http://standards.ieee.org/guides/bylaws/sect6-7.html#6 > and < http://standards.ieee.org/guides/opman/sect6.html#6.3 >. Further information is located at < http://standards.ieee.org/board/pat/pat-material.html > and < http://standards.ieee.org/board/pat >.	

Extension of OFDMA Physical layer mode to support 256 & 1024 point QAM constellations for high capacity back-haul applications

David Castelow, Andrew Logothetis and Marlon Persaud

Airspan Communications Ltd

19/03/2013

Scope

This document is in response to the call for contributions to the 802.16r PAR. It specifies changes required to the “IEEE Std 802.16-2012” [1] standard to implement the 256- and 1024-QAM modulation using Convolutional Turbo Codes (CTCs), together with the introduction of a new block size to allow efficient use of the increased spectral efficiency.

References

- [1] 802.16-2012, IEEE Standard for Air Interface for Broadband Wireless Access Systems, May 2012.
- [2] 802.16.1-2012, IEEE Standard for WirelessMAN-Advanced Air Interface for Broadband Wireless Access Systems, September 2012.

Background

The 802.16r PAR calls for contributions to support high-order modulations, and specifically mentions 256, 512 and 1024 point QAM. The increase in spectral efficiency is required to support applications such as small cell backhaul.

It should be noted that the 256 and 1024 point QAM are conventional “square” constellations that result from being of the form $2^{(2n)}$, that is not the case for 512-point QAM. It is the opinion of the authors of this contribution that system gains associated with the non-square 512-point QAM constellation are questionable and do not justify the increased complexity. Equivalent gains can be obtained using the 1024-point constellation along with stronger forward error correction. As a result this contribution does not consider 512-point QAM any further.

This contribution addresses changes in the OFMDA physical layer mode only.

In addition to PHY changes, we introduce a new MAC message to support signaling of both CQI and HARQ ACK/NACK from MS, as an alternative to using HARQ ACK/NACK signaling regions. Although similar to the HARQ messages used for Relay, there is no single message that allows an MS to report both CQI and HARQ ACK/NACK.

Requirements

Mac Message

We propose to enhance the capacity of the system by eliminating the need to allocate a fixed region for CQI and HARQ ACK/NACK signals. This is appropriate for systems with very few MS and when the operating SNR for all links is high, as is envisaged for the use of the standard in Small Cell Backhaul (SCB) applications. To allow signaling of the same information, we introduce a Channel state information message (SCB_CHN_INFO).

Replace the following line from Table 6-51:

Type	Message Name	Message Description	Connection
110–255		<i>Reserved</i>	

With

Type	Message Name	Message Description	Connection
110	SCB_CHN_INFO	CQI and HARQ ACK/NACK of received message	
111–255		<i>Reserved</i>	

After section 6.3.2.3.98 introduce the following text:

6.3.2.3.99 SCB_CHN_INFO

If the BS does not schedule a PUSC region in a frame and therefore not include a HARQ ACK/NACK or CQI feedback channel and makes an allocation for the MS, then an MS supporting SCB shall transmit an SCB_CHN_INFO management message in the first allocated slot. Each MS may be required to supply at most 2 CQI reports. It is the BS responsibility to schedule appropriate slots and modulation/coding to allow the MS to transmit this information.

Table 6-227A – SCB_CHN_INFO

Syntax	Size (bit)	Notes
SCB_CHN_INFO_Message_format() {		
Management Message Type = 110	8	
Number of CQI Reports (-1)	1	0: 1 report, 1: 2 reports
Frame Number	3	Least significant 3 bits of frame number that this message refers to.
CQI Report 1	6	CQI feedback, see section 8.4.11.6 and table 8-336
CQI Report 2	6	CQI feedback, see section 8.4.11.6 and table 8-336
HARQ ACK bitmap	16	DL HARQ limited to 16 per MS.

Channel Coding

Channel coding procedures include randomization (see 8.4.9.1 of [1]), FEC encoding (see 8.4.9.2 of [1]), bit interleaving (see 8.4.9.3 of [1]), repetition (see 8.4.9.5 of [1]), and modulation (see 8.4.9.4 of [1]). Repetition is only applied to QPSK modulation.

Based on Table 8-317 of [1], the valid FEC block sizes N_{EP} (measured in bits prior to encoding) are: 48, 72, 96, 144, 192, 216, 240, 288, 360, 384, 432, and 480. The N_{EP} have been chosen in such a way that for any of the predefined modulation and coding scheme, a slot's worth of data is mapped to one of the FEC blocks. Here, a new FEC block size of 320 bits is introduced for the two highest modulations. This is done to support the 5/6 rate for 256-QAM and 2/3 rate for 1024-QAM. We also introduce three new rates: 5/8 for 256-QAM, and 3/5 and 4/5 for 1024-QAM. This was done in order to support the pre-existing FEC block sizes.

For CTC, the valid coding rates for 256-QAM are:

- $1/2 = 0.500$, ($N_{EP} = 192$)
- $5/8 = 0.625$, ($N_{EP} = 240$)

- $3/4 = 0.755$, ($N_{EP} = 288$)
- $5/6 = 0.833$, ($N_{EP} = 320$)

For **CTC**, the valid coding rates for 1024-QAM are:

- $3/5 = 0.600$, ($N_{EP} = 288$)
- $2/3 = 0.667$, ($N_{EP} = 320$)
- $3/4 = 0.750$, ($N_{EP} = 360$)
- $4/5 = 0.800$, ($N_{EP} = 384$)

Interleaving: To support higher performance in systems where we expect large packets to be encoded, we propose increasing the number of different CTC interleaver options. These are included in the changes to the tables below. The interleaver parameters have been chosen to be, as far as possible, compatible with those described in IEEE 802.16-2012 [1], either Table 8-304 or 8-305, or using values already accepted for IEEE 802.16.1-2012, table 6-309 [2].

UCD management message encoding

The FEC code type and modulation type field of the UCD burst profile encodings, of Tables 11-18 of the standard [1], shall be augmented with new values:

Editorial Instruction:

In Table 11-18, replace

FEC Code type and modulation type	150	1	53..255= <i>Reserved</i>
-----------------------------------	-----	---	--------------------------

With the following

FEC Code type and modulation type	150	1	53 = 256-QAM (CTC) 1/2
			54 = 256-QAM (CTC) 5/8
			55 = 256-QAM (CTC) 3/4
			56 = 256-QAM (CTC) 5/6
			57 = 1024-QAM (CTC) 3/5
			58 = 1024-QAM (CTC) 2/3
			59 = 1024-QAM (CTC) 3/4
			60 = 1024-QAM (CTC) 4/5
			61..255= <i>Reserved</i>

DCD management message encoding

The FEC code type and modulation type field of the DCD burst profile encodings, of Tables 11-25 of the standard [1], shall be augmented with new values:

Editorial Instruction:

In Table 11-25, replace

FEC Code type and modulation type	150	1	53..255=Reserved

With the following

FEC Code type and modulation type	150	1	53 = 256-QAM (CTC) 1/2
			54 = 256-QAM (CTC) 5/8
			55 = 256-QAM (CTC) 3/4
			56 = 256-QAM (CTC) 5/6
			57 = 1024-QAM (CTC) 3/5
			58 = 1024-QAM (CTC) 2/3
			59 = 1024-QAM (CTC) 3/4
			60 = 1024-QAM (CTC) 4/5
			61..255=Reserved

8.4.9.2.3.1 CTC encoder

Modify the following text:

The encoding block size shall depend on the number of slots allocated and the modulation specified for the current transmission. Concatenation of a number of slots shall be performed in order to make larger blocks of coding where it is possible, with the limitation of not exceeding the largest supported block size for the applied modulation and coding. Table 8-313 specifies the concatenation of slots for different allocations and modulations. The concatenation rule shall not be used when using IR HARQ.

For any modulation and FEC rate, given an allocation of n slots, the following parameters are defined:

j is parameter dependent on the modulation and FEC rate

p is a parameter dependent on the modulation and FEC rate

n is floor(number of allocated slots * STC rate/(repetition factor * number of STC layers))

k is floor(n/j)

m is $n \bmod j$

Table 8-312 shows the rules used for slot concatenation when $p = 1$. If $p \neq 1$ then Table 8-312A shall be used instead.

Modify the title of Table 8-312 as follows:

Table 8-312—Slots concatenation rule for CTC, if $p=1$.

Insert the following after Table 8-312:

Table 8-312A —Slots concatenation rule for CTC, if $p \neq 1$.

Slots concatenated
if $p \neq 1$ then the possible block sizes are 1 and $m \cdot p$ for $m \leq (j/p)$. Generate $\text{floor}(n/j)$ blocks of size j slots, then replace n by the remainder ($n - j \cdot \text{floor}(n/j)$) and j by $j - p$. Continue until $j = p$, then generate n blocks of 1 slot.

Replace “Encoding slot concatenation for different rates in CTC” Table 8-313, Sec. 8.4.9.2.3.1 of [1], by the following text:

Modulation and rate	j	p
QPSK-1/2	10	1
QPSK-3/4	6	1
16-QAM-1/2	5	1
16-QAM-3/4	3	1
64-QAM-1/2	3	1
64-QAM-2/3	2	1
64-QAM-3/4	2	1
64-QAM-5/6	2	1
256-QAM-1/2	25	5
256-QAM-5/8	20	4
256-QAM-3/4	10	5
256-QAM-5/6	15	3
1024-QAM-3/5	10	10
1024-QAM-2/3	15	3
1024-QAM-3/4	8	8
1024-QAM-4/5	10	5

Table 8-313. Encoding slot concatenation for 1024-QAM and various rates in CTC.

The “Parameters for the subblock interleavers” Table 8-317, Sec. 8.4.9.2.3.4.2 of [1], shall be augmented with the new block size as shown in Table 1 below:

Block size (bits) N_{EP}	N	Subblock interleaver parameters	
		m	J
320	110	6	3

Table 1. Parameters for the subblock interleavers

Augment Table 8-314 “CTC channel coding per modulation”, Sec. 8.4.9.2.3.1 of [1], with the contents of Table 2 below:

Modulation	Data block size (bytes)	Encoding data block size (bytes)	Code rate	N	P0	P1	P2	P3
<u>256-QAM</u>	<u>24</u>	<u>48</u>	<u>1/2</u>	<u>96</u>	<u>7</u>	<u>48</u>	<u>24</u>	<u>72</u>
<u>256-QAM</u>	<u>120</u>	<u>240</u>	<u>1/2</u>	<u>480</u>	<u>53</u>	<u>62</u>	<u>12</u>	<u>2</u>
<u>256-QAM</u>	<u>240</u>	<u>480</u>	<u>1/2</u>	<u>960</u>	<u>43</u>	<u>64</u>	<u>300</u>	<u>824</u>
<u>256-QAM</u>	<u>360</u>	<u>720</u>	<u>1/2</u>	<u>1440</u>	<u>43</u>	<u>720</u>	<u>360</u>	<u>540</u>
<u>256-QAM</u>	<u>480</u>	<u>960</u>	<u>1/2</u>	<u>1920</u>	<u>31</u>	<u>8</u>	<u>24</u>	<u>16</u>
<u>256-QAM</u>	<u>600</u>	<u>1200</u>	<u>1/2</u>	<u>2400</u>	<u>53</u>	<u>66</u>	<u>24</u>	<u>2</u>
<u>256-QAM</u>	<u>30</u>	<u>48</u>	<u>5/8</u>	<u>120</u>	<u>13</u>	<u>60</u>	<u>0</u>	<u>60</u>
<u>256-QAM</u>	<u>120</u>	<u>192</u>	<u>5/8</u>	<u>480</u>	<u>53</u>	<u>62</u>	<u>12</u>	<u>2</u>
<u>256-QAM</u>	<u>240</u>	<u>384</u>	<u>5/8</u>	<u>960</u>	<u>43</u>	<u>64</u>	<u>300</u>	<u>824</u>
<u>256-QAM</u>	<u>360</u>	<u>576</u>	<u>5/8</u>	<u>1440</u>	<u>43</u>	<u>720</u>	<u>360</u>	<u>540</u>
<u>256-QAM</u>	<u>480</u>	<u>768</u>	<u>5/8</u>	<u>1920</u>	<u>31</u>	<u>8</u>	<u>24</u>	<u>16</u>
<u>256-QAM</u>	<u>600</u>	<u>960</u>	<u>5/8</u>	<u>2400</u>	<u>53</u>	<u>66</u>	<u>24</u>	<u>2</u>
<u>256-QAM</u>	<u>36</u>	<u>48</u>	<u>3/4</u>	<u>144</u>	<u>17</u>	<u>74</u>	<u>72</u>	<u>2</u>
<u>256-QAM</u>	<u>360</u>	<u>480</u>	<u>3/4</u>	<u>1440</u>	<u>43</u>	<u>720</u>	<u>360</u>	<u>540</u>
<u>256-QAM</u>	<u>40</u>	<u>48</u>	<u>5/6</u>	<u>160</u>	<u>17</u>	<u>84</u>	<u>108</u>	<u>132</u>
<u>256-QAM</u>	<u>120</u>	<u>144</u>	<u>5/6</u>	<u>480</u>	<u>53</u>	<u>62</u>	<u>12</u>	<u>2</u>
<u>256-QAM</u>	<u>240</u>	<u>288</u>	<u>5/6</u>	<u>960</u>	<u>43</u>	<u>64</u>	<u>300</u>	<u>824</u>
<u>256-QAM</u>	<u>360</u>	<u>432</u>	<u>5/6</u>	<u>1440</u>	<u>43</u>	<u>720</u>	<u>360</u>	<u>540</u>
<u>256-QAM</u>	<u>480</u>	<u>576</u>	<u>5/6</u>	<u>1920</u>	<u>31</u>	<u>8</u>	<u>24</u>	<u>16</u>
<u>256-QAM</u>	<u>600</u>	<u>720</u>	<u>5/6</u>	<u>2400</u>	<u>53</u>	<u>66</u>	<u>24</u>	<u>2</u>
<u>1024-QAM</u>	<u>36</u>	<u>60</u>	<u>3/5</u>	<u>144</u>	<u>17</u>	<u>74</u>	<u>72</u>	<u>2</u>
<u>1024-QAM</u>	<u>360</u>	<u>600</u>	<u>3/5</u>	<u>1440</u>	<u>43</u>	<u>720</u>	<u>360</u>	<u>540</u>
<u>1024-QAM</u>	<u>40</u>	<u>60</u>	<u>2/3</u>	<u>160</u>	<u>17</u>	<u>84</u>	<u>108</u>	<u>132</u>
<u>1024-QAM</u>	<u>120</u>	<u>180</u>	<u>2/3</u>	<u>480</u>	<u>53</u>	<u>62</u>	<u>12</u>	<u>2</u>
<u>1024-QAM</u>	<u>240</u>	<u>360</u>	<u>2/3</u>	<u>960</u>	<u>43</u>	<u>64</u>	<u>300</u>	<u>824</u>
<u>1024-QAM</u>	<u>360</u>	<u>540</u>	<u>2/3</u>	<u>1440</u>	<u>43</u>	<u>720</u>	<u>360</u>	<u>540</u>
<u>1024-QAM</u>	<u>480</u>	<u>720</u>	<u>2/3</u>	<u>1920</u>	<u>31</u>	<u>8</u>	<u>24</u>	<u>16</u>
<u>1024-QAM</u>	<u>600</u>	<u>900</u>	<u>2/3</u>	<u>2400</u>	<u>53</u>	<u>66</u>	<u>24</u>	<u>2</u>
<u>1024-QAM</u>	<u>45</u>	<u>60</u>	<u>3/4</u>	<u>180</u>	<u>11</u>	<u>90</u>	<u>0</u>	<u>90</u>
<u>1024-QAM</u>	<u>360</u>	<u>480</u>	<u>3/4</u>	<u>1440</u>	<u>43</u>	<u>720</u>	<u>360</u>	<u>540</u>
<u>1024-QAM</u>	<u>48</u>	<u>60</u>	<u>4/5</u>	<u>192</u>	<u>11</u>	<u>96</u>	<u>48</u>	<u>144</u>
<u>1024-QAM</u>	<u>240</u>	<u>300</u>	<u>4/5</u>	<u>960</u>	<u>43</u>	<u>64</u>	<u>300</u>	<u>824</u>
<u>1024-QAM</u>	<u>480</u>	<u>600</u>	<u>4/5</u>	<u>1920</u>	<u>31</u>	<u>8</u>	<u>24</u>	<u>16</u>

Table 2. CTC channel coding for increased block sizes and for 256- and 1024-QAM

Data Modulation

Modify the following text from section

8.4.9.4.2 Data modulation:

After the repetition block, the data bits are entered serially to the constellation mapper. Gray-mapped QPSK and 16-QAM (as shown in Figure 8-128) shall be supported, whereas the support of 64-QAM, [256-QAM](#) and [1024-QAM](#) is optional.

The constellations (as shown in Figure 8-128 [and Figures 8-128A and 8-128B](#)) shall be normalized by multiplying the constellation point with the indicated factor c to achieve equal average power.

And add the following text and figures:

The Gray-mapped 256-QAM is shown in FigureFigure 8-128A The constellation shall be normalised by multiplying the constellation point by the factor $c = 1/\sqrt{170}$ to achieve equal average power.

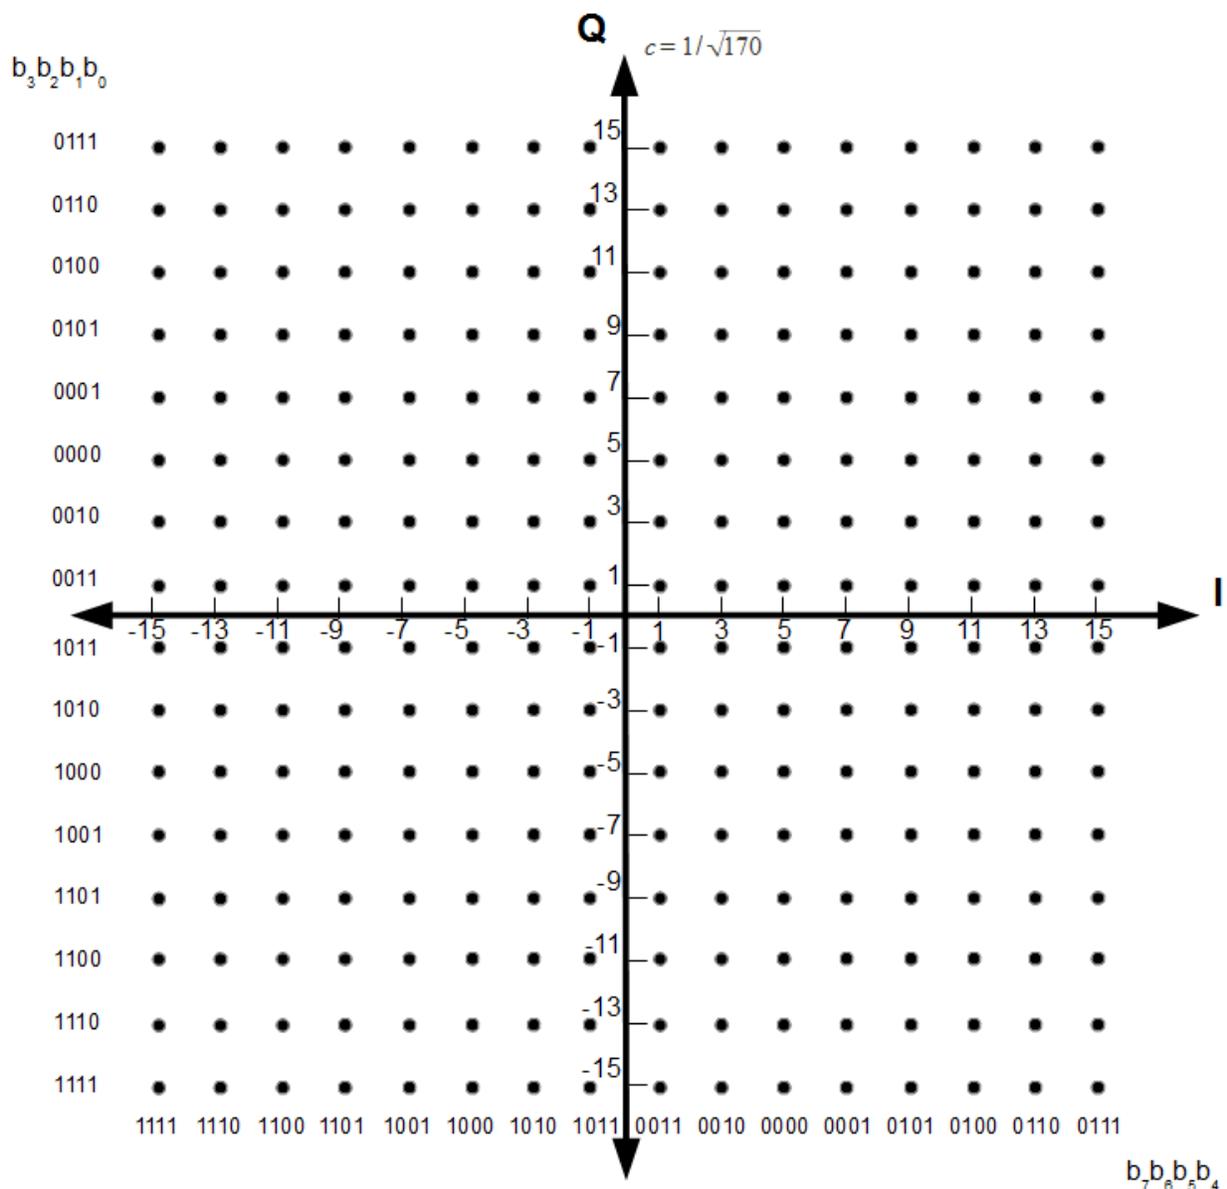


Figure 8-128A. 256-QAM constellation

The Gray-mapped 1024-QAM is shown in Figure 8-128B. The constellation shall be normalised by multiplying the constellation point by the factor $c = 1/\sqrt{682}$ to achieve equal average power.

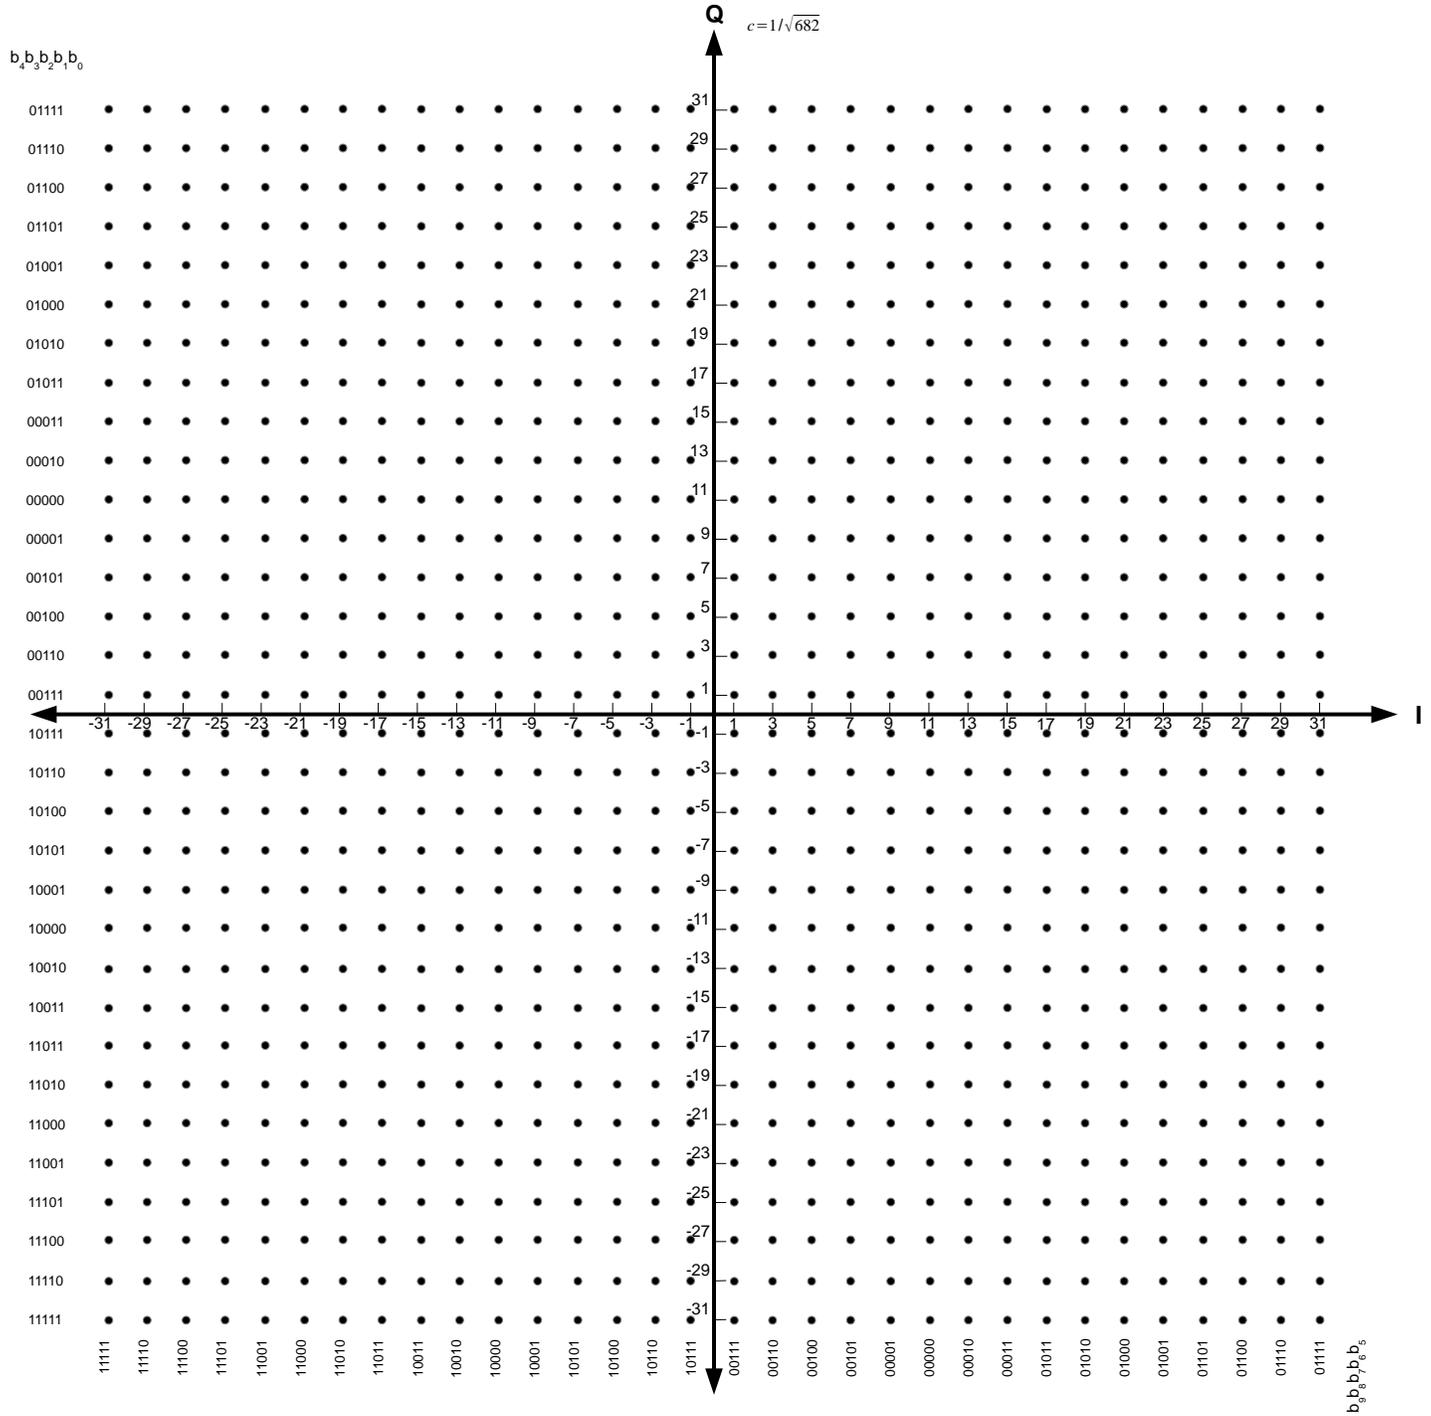


Figure 8-128B. 1024-QAM constellation

Capabilities Exchange

There is a requirement to signal the capabilities of the SS/MS modulator/demodulator.

In section:

11.8.3.5.2 OFDMA SS demodulator

Modify

Bits 13–15: *Reserved*; shall be set to zero.

To read

Bit 13: 256-QAM supported.

Bit 14: 1024-QAM supported.

Bit 15: *Reserved*; shall be set to zero.

In section

11.8.3.5.3 OFDMA SS modulator

Modify the table as follows:

Type	Length	Value	Scope
152	+ variable	Bit 0: 64-QAM Bit 1: BTC Bit 2: CTC Bit 3: STC Bit 4: HARQ chase Bit 5: CTC_IR Bit 6: CC_IR Bit 7: LDPC <u>Bit 8: 256-QAM</u> <u>Bit 9: 1024-QAM</u>	SBC-REQ (see 6.3.2.3.23) SBC-RSP (see 6.3.2.3.24)