

1 **IEEE P802.24**
2 **Vertical Applications Technical Advisory Group**
3

Project IEEE P802.24 Vertical Applications Technical Advisory Group

Title **IEEE 802 Networks for Vertical Applications White Paper**

Date 2023-05-16
Submitted

Source Max Riegel, leveraging content of
24-19-0017-15-0000-ieee-802-solutions-for-vertical-applications.docx

Re: Some further edits to Chapter 7 to address discussions at last plenary

Abstract

Purpose

Notice This document has been prepared to assist the IEEE P802.24. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.24.

1 Background and Introduction

IEEE 802 technologies are used for a wide variety of applications and markets. Although the widespread usage and overwhelming adoption as PHY and Link layer technologies for all kind of information and communication solutions, a common perception of the value and differentiation of the IEEE 802 architecture in the context of vertical markets is not established, as well as there are no clear views about the reasons why IEEE 802 would be better suited to deployments in the communication infrastructure of private enterprise, industry, and the individual user, and how does IEEE 802 compare to network architectures oriented towards service providers.

In a first stance it could be agreed that the IEEE 802 architecture enables networks that are like Ethernet: Well understood, mature, predictable, offering a “cleaner” integration of disparate technologies under the common architecture and addressing.

This white-paper is aimed to collect and spell out commonalities of IEEE 802 technologies and sets the scene in relation to other well-known communication standards of similar behavior.

2 Requirements of Vertical Applications

This section defines the characteristics of Vertical Applications that usually integrate various systems including network connectivity in order to perform specific tasks or enable use cases for their industry.

2.1 Defining “Vertical”

In the context of this white paper, Vertical Applications refers to networks that serve specific use cases in specific market segments. The network is used by the entity to enable its business processes. This is in contrast to an access network, where the network services are the product.

Vertical markets involved specific usage models:

- Industrial automation
- Building Automation
- Smart Cities
- Smart Grid / Utility
- Automotive / transportation
- Agriculture
- Connected Supply Chain
- Critical infrastructure protection and control
- Wide area gaming (including AR/VR)

There are other ways of looking at ‘Vertical’. Vertical integration is really a competition/anti-trust term, rather than a technical term. In that context it describes a technical situation that some set of functionalities that may be provided by the same company could actually in practice also be provided by different companies. So, for instance, "5G" is "vertically integrated" because it

45 actually assumes in its technical specifications that a single commercial provider will be
46 responsible for a whole range of different features that are not really separable. In that sense
47 IEEE 802 technologies are not "vertically integrated" because they can be deployed by different
48 operators of completely different networks (e.g. one leverages wired connections, while others
49 are based on wireless connectivity). Nevertheless, IEEE 802 plays a role in vertical integration
50 through providing the plain connectivity layer, e.g. IEEE 802.11 in IEEE 1609 vehicle-to-vehicle
51 communications, or IEEE 802.15.4 in the SEP.

52
53 Vertical markets often require highly-engineered networks to guarantee the quality of the
54 required communication services. Quite often vertical markets follow extended lifecycles; the
55 vertical network is expected to remain in service for a longer time than a service-provider
56 network. And vertical markets may have different cost models compared to usual public
57 communication networks with some are opex averse, others are more capex averse.

58 **3 Economic Aspects for Vertical Application Networks**

59 IEEE 802 based networks are usually aimed to “enable creating/delivering a product” instead of
60 “the network is the product” defined by a open standard:

- 61 • IEEE needs to think about how to create that package without a “subscription model”
- 62 • IEEE 802 is often free to use
- 63 • IEEE 802 is deployed in vertical markets, where the network is owned and operated by
64 the user of the services.
- 65 • There are also other models than subscription that provide ancillary economic value.
 - 66 – An economy of scale can be accomplished by creating a network that can be
67 leveraged by multiple entities. This is similar to the cloud thinking – the model of
68 sharing the infrastructure (network) without the need for them to be independently
69 installed and managed. A similar concept to a data center just providing
70 computing resources, but not dealing with installing and running software for all
71 the services needed.
 - 72 – The trend toward more virtualization is a strength of IEEE 802 because it allows
73 the network to be better prepared for that virtualization. It provides the clean
74 separation between the infrastructure and the service running on the
75 infrastructure. In the IEEE 802 case, this is the layer 2 to layer 3 boundary.
 - 76 – The IEEE 802.3 Ethernet transport is the most well understood transport in
77 existence. This is analogous to the X86 computer architecture that became the
78 basis for the computing resources of data centers.
- 79 • IEEE 802 and unlicensed spectrum enables faster innovation
 - 80 – Many of the breakthrough innovations were not as planned
 - 81 – The story of why IEEE 802 complements everything else, and everything else
82 (alone) is not sufficient.
- 83 • IoT is built around many specialized niches. The challenge is meeting their diverse
84 requirements. No single standard can address all of them well. IEEE 802 provides
85 multiple standards to address multiple IoT applications.

- 86 • The model for network management requires special attention, when the owner/operator
87 of the network may have less expertise in network management. Guidance is desired on
88 how to manage and operate a private network. Usually, this is simpler because the IEEE
89 802 network is simpler (compared to 3GPP, for example), but the documentation is often
90 not really mature or available. Yang modeling describes the interface, but more
91 knowledge is needed to understand how to use the network management data that is
92 available through the interface.

93 3.1.1 Modularity and Interchangeability, competition economics

94 A user of a vertical application may want to be able to replace parts of their vertical application
95 network with a better, newer product when one arrives (for instance, installing a new AP when a
96 better one is available from a different vendor). IEEE 802 products lend themselves to this form
97 of user-empowered modularity.
98 Building blocks with smaller functional content and broader variation offer this flexibility to the
99 vertical application. 3GPP 5G (or cellular networks in general) does not have this modular
100 feature. Although many vendors of UEs can be certified to the specifications, it is much harder
101 for the network owner to mix multiple vendors in the RAN and Core of the network.

102 3.1.2 Possibility of small business entities deploying small scale networks

103 It would be possible for a small utility or municipality with only a few employees to set up a
104 reasonably secure Wi-Fi network at their workplace, perhaps with temporary help from a
105 consultant if they were making sure it was really secure. But they would find it much more
106 difficult to acquire a municipal spectrum license for LTE technologies, and install, configure,
107 and maintain a 3GPP private network infrastructure.
108 IEEE 802 also enables a greater degree of scalability. A network that starts small can easily be
109 scaled to more complexity and users as the business grows. A 3GPP access network is designed
110 from the start for large scale, and is more difficult to apply at a small scale.

111 4 Key Aspects of the IEEE 802 Technologies for Vertical 112 Applications

113 4.1 Layering

- 114 • IEEE 802 is a transport network
115 • IEEE 802 is Layer 2
116 • IEEE 802 provides direct and simultaneous support of IPv4 and IPv6 or pure layer 2
117 protocols
118 • IEEE 802 offers trade-off and optimizations between flexibility (L2) and scalability (L3)

119 4.2 Routing and Bridging

- 120 • IEEE 802 enables networks to scale with routing and bridging.

- 121 • IEEE 802 supports layer 3 protocols such as IP, which enables routing to enable IEEE
- 122 802 networks to expand to higher scale
- 123 • IEEE 802 networks can be built at smaller scale to provide more flexibility
- 124 • Smaller scale provides opportunity for real-time
- 125 • IEEE 802 standards can emulate a point to point network over a wireless point to
- 126 multipoint network to enable bridging over the wireless link.
- 127 • IEEE 802 can support multiple different L3 and above protocol suites
- 128 • IEEE 802 can also offer L2 routing when appropriate (e.g. 802.15.10)
- 129 - Note: Not an alternative to L3 routing, but there to address a different problem

130 4.3 Management and Control

- 131 • IEEE 802 does not provide as many means of control for a specific end device and its
- 132 traffic on a path.
- 133 • There are some management facilities in some standards
- 134 • It is easier for IEEE 802 to support an “unmanaged” network, such as consumer Wi-Fi.
- 135 • 802 provides local networks that may be (but don’t have to be) connected into the
- 136 Internet or other networks.
- 137 • Public operator networks are focused on services for single devices, while IEEE 802
- 138 networks support and include multiple devices (networks of networks) – devices can
- 139 communicate with each other as well as with other networks
- 140

141 5 IEEE 802 standards aimed for vertical applications

142 5.1 IEEE 802 Overview and Architecture

- 143 • 802-2014 - IEEE Standard for Local and Metropolitan Area Networks: Overview and
- 144 Architecture
- 145 • 802c-2017 - IEEE Standard for Local and Metropolitan Area Networks: Overview and
- 146 Architecture--Amendment 2: Local Medium Access Control (MAC) Address Usage
- 147 • 802d-2017 - IEEE Standard for Local and Metropolitan Area Networks: Overview and
- 148 Architecture Amendment 1: Allocation of Uniform Resource Name (URN) Values in
- 149 IEEE 802(R) Standards
- 150 • 802E-2020 - IEEE Recommended Practice for Privacy Considerations for IEEE 802(R)
- 151 Technologies

152 5.2 IEEE 802.1 Bridging and Management

- 153 • 802.1AB-802.1AB-2016 - IEEE Standard for Local and metropolitan area networks -
- 154 Station and Media Access Control Connectivity Discovery
- 155 • 802.1AC-802.1AC-2016/Cor 1-2018 - IEEE Standard for Local and Metropolitan Area
- 156 Networks--Media Access Control (MAC) Service Definition - Corrigendum 1: Logical
- 157 Link Control (LLC) Encapsulation EtherType

- 158 • 802.1AC-802.1AC-2016 - IEEE Standard for Local and metropolitan area networks --
159 Media Access Control (MAC) Service Definition
- 160 • 2018/Cor 1-2020 - IEEE Standard for Local and metropolitan area networks--Media
161 Access Control (MAC) Security Corrigendum 1: Tag Control Information
162 Figure802.1AE-2018 - IEEE Standard for Local and metropolitan area networks-Media
163 Access Control (MAC) Security
- 164 • 802.1AE-2018/Cor 1-2020 - IEEE Standard for Local and metropolitan area networks--
165 Media Access Control (MAC) Security Corrigendum 1: Tag Control Information Figure
- 166 • 802.1AR-2018 - IEEE Standard for Local and Metropolitan Area Networks - Secure
167 Device Identity
- 168 • 802.1AS-2020 - IEEE Standard for Local and Metropolitan Area Networks--Timing and
169 Synchronization for Time-Sensitive Applications
- 170 • 802.1AX-2020 - IEEE Standard for Local and Metropolitan Area Networks--Link
171 Aggregation
- 172 • 802.1BA-802.1BA-2011/Cor 1-2016 - IEEE Standard for Local and metropolitan area
173 networks-- Audio Video Bridging (AVB) Systems-- Corrigendum 1: Technical and
174 Editorial Corrections
- 175 • 802.1BR-802.1BR-2012 - IEEE Standard for Local and metropolitan area networks--
176 Virtual Bridged Local Area Networks--Bridge Port Extension
- 177 • 802.1CB-802.1CB-2017 - IEEE Standard for Local and metropolitan area networks--
178 Frame Replication and Elimination for Reliability
- 179 • 802.1CF-802.1CF-2019 - IEEE Recommended Practice for Network Reference Model
180 and Functional Description of IEEE 802(R) Access Network
- 181 • 802.1CM-2018 - IEEE Standard for Local and metropolitan area networks -- Time-
182 Sensitive Networking for Fronthaul
- 183 • 802.1CMde-802.1CMde-2020 - IEEE Standard for Local and metropolitan area networks
184 -- Time-Sensitive Networking for Fronthaul - Amendment 1: Enhancements to Fronthaul
185 Profiles to Support New Fronthaul Interface, Synchronization, and Syntonization
186 Standards
- 187 • 2018 - IEEE Standard for Local and metropolitan area networks -- Time-Sensitive
188 Networking for Fronthaul802.1CS-2020 - IEEE Standard for Local and Metropolitan
189 Area Networks--Link-local Registration Protocol
- 190 • 802.1Q-2018 - IEEE Standard for Local and Metropolitan Area Network--Bridges and
191 Bridged Networks
- 192 • 802.1Qcr-802.1Qcr-2020 - IEEE Standard for Local and Metropolitan Area Networks--
193 Bridges and Bridged Networks - Amendment 34:Asynchronous Traffic Shaping
- 194 • 802.1Qcx-802.1Qcx-2020 - IEEE Standard for Local and Metropolitan Area Networks--
195 Bridges and Bridged Networks Amendment 33: YANG Data Model for Connectivity
196 Fault Management
- 197 • 802.1Qcy-802.1Qcy-2019 - IEEE Standard for Local and Metropolitan Area Networks--
198 Bridges and Bridged Networks Amendment 32: Virtual Station Interface (VSI) Discovery

- 199 and Configuration Protocol (VDP) Extension to Support Network Virtualization Overlays
200 Over Layer 3 (NVO3)
- 201 • 802.1Qcc-802.1Qcc-2018 - IEEE Standard for Local and Metropolitan Area Networks--
202 Bridges and Bridged Networks -- Amendment 31: Stream Reservation Protocol (SRP)
203 Enhancements and Performance Improvements
 - 204 • 802.1Qcp-2018 - IEEE Standard for Local and metropolitan area networks--Bridges and
205 Bridged Networks--Amendment 30: YANG Data Model
 - 206 • 802.1X-2020 - IEEE Standard for Local and Metropolitan Area Networks--Port-Based
207 Network Access Control

208 5.3 IEEE 802.3: Ethernet

- 209 • 802.3-2018 - IEEE Standard for Ethernet
- 210 • 802.3cp-802.3cp-2021 - IEEE Standard for Ethernet -- Amendment 14: Bidirectional 10
211 Gb/s, 25 Gb/s, and 50 Gb/s Optical Access PHYs
- 212 • 802.3cv-802.3cv-2021 - IEEE Standard for Ethernet Amendment 12: Maintenance #15:
213 Power over Ethernet
- 214 • 802.3cu-2021 - IEEE Standard for Ethernet - Amendment 11: Physical Layers and
215 Management Parameters for 100 Gb/s and 400 Gb/s Operation over Single-Mode Fiber at
216 100 Gb/s per Wavelength
- 217 • 802.3cr-2021 - IEEE Standard for Ethernet Amendment 10: Maintenance #14: Isolation
- 218 • 802.3ch-2020 - IEEE Standard for Ethernet--Amendment 8: Physical Layer
219 Specifications and Management Parameters for 2.5 Gb/s, 5 Gb/s, and 10 Gb/s
220 Automotive Electrical Ethernet
- 221 • 802.3ca-2020 - IEEE Standard for Ethernet Amendment 9: Physical Layer Specifications
222 and Management Parameters for 25 Gb/s and 50 Gb/s Passive Optical Networks
- 223 • 802.3cq-2020 - IEEE Standard for Ethernet Amendment 6: Maintenance #13: Power over
224 Ethernet over 2 pairs
- 225 • 802.3cq-802.3cq-2020 - IEEE Standard for Ethernet Amendment 6: Maintenance #13:
226 Power over Ethernet over 2 pairs
- 227 • 802.3cg-802.3cg-2019 - IEEE Standard for Ethernet - Amendment 5: Physical Layer
228 Specifications and Management Parameters for 10 Mb/s Operation and Associated Power
229 Delivery over a Single Balanced Pair of Conductors
- 230 • 802.3cm-2020 - IEEE Standard for Ethernet -- Amendment 7: Physical Layer and
231 Management Parameters for 400 Gb/s over Multimode Fiber
- 232 • 802.3cn-2019 - IEEE Standard for Ethernet - Amendment 4: Physical Layers and
233 Management Parameters for 50Gb/s, 200Gb/s, and 400Gb/s Operation over Single-Mode
234 Fiber
- 235 • 802.3cd-2018 - IEEE Standard for Ethernet - Amendment 3: Media Access Control
236 Parameters for 50 Gb/s and Physical Layers and Management Parameters for 50 Gb/s,
237 100 Gb/s, and 200 Gb/s Operation
- 238 • 802.3bt-802.3bt-2018 - IEEE Standard for Ethernet Amendment 2: Physical Layer and
239 Management Parameters for Power over Ethernet over 4 pairs

- 240 • 802.3cb-802.3cb-2018 - IEEE Standard for Ethernet - Amendment 1: Physical Layer
- 241 Specifications and Management Parameters for 2.5 Gb/s and 5 Gb/s Operation over
- 242 Backplane
- 243 • 802.3cc-802.3cc-2017 - IEEE Standard for Ethernet - Amendment 11: Physical Layer
- 244 and Management Parameters for Serial 25 Gb/s Ethernet Operation Over Single-Mode
- 245 Fiber
- 246 • 802.3.1-802.3.1-2013 - IEEE Standard for Management Information Base (MIB)
- 247 Definitions for Ethernet
- 248 • 802.3.2-2019 - IEEE Standard for Ethernet - YANG Data Model Definitions

249 5.4 IEEE 802.11: Wireless LAN

- 250 • 802.11-2020 - IEEE Standard for Information Technology--Telecommunications and
- 251 Information Exchange between Systems - Local and Metropolitan Area Networks--
- 252 Specific Requirements - Part 11: Wireless LAN Medium Access Control (MAC) and
- 253 Physical Layer (PHY) Specifications
- 254 • 802.11ax-2021 - IEEE Standard for Information Technology--Telecommunications and
- 255 Information Exchange between Systems Local and Metropolitan Area Networks--
- 256 Specific Requirements Part 11: Wireless LAN Medium Access Control (MAC) and
- 257 Physical Layer (PHY) Specifications Amendment 1: Enhancements for High-Efficiency
- 258 WLAN
- 259 • 802.11ay-802.11ay-2021 - IEEE Standard for Information Technology--
- 260 Telecommunications and Information Exchange between Systems Local and
- 261 Metropolitan Area Networks--Specific Requirements Part 11: Wireless LAN Medium
- 262 Access Control (MAC) and Physical Layer (PHY) Specifications Amendment 2:
- 263 Enhanced Throughput for Operation in License-exempt Bands above 45 GHz
- 264 • 802.11ba-802.11ba-2021 - IEEE Standard for Information Technology--
- 265 Telecommunications and Information Exchange between Systems Local and
- 266 Metropolitan Area Networks--Specific Requirements Part 11: Wireless LAN Medium
- 267 Access Control (MAC) and Physical Layer (PHY) Specifications Amendment 3: Wake-
- 268 Up Radio Operation

269 5.5 IEEE 802.15: Wireless Specialty Networks

- 270 • 802.15.3-2016 - IEEE Standard for High Data Rate Wireless Multi-Media Networks
- 271 • 802.15.3f-2017 - IEEE Standard for High Data Rate Wireless Multi-Media Networks
- 272 Amendment 3: Extending the Physical Layer (PHY) Specification for Millimeter Wave
- 273 to Operate from 57.0 GHz to 71 GHz
- 274 • 802.15.3d-2017 - IEEE Standard for High Data Rate Wireless Multi-Media Networks--
- 275 Amendment 2: 100 Gb/s Wireless Switched Point-to-Point Physical Layer
- 276 • 802.15.3e-2017 - IEEE Standard for High Data Rate Wireless Multi-Media Networks--
- 277 Amendment 1: High-Rate Close Proximity Point-to-Point Communications
- 278 • 802.15.4-2020 - IEEE Standard for Low-Rate Wireless Networks

- 279 • 802.15.4y-802.15.4y-2021 - IEEE Standard for Low-Rate Wireless Networks
280 Amendment 3: Advanced Encryption Standard (AES)-256 Encryption and Security
281 Extensions
- 282 • 802.15.4w-802.15.4w-2020 - IEEE Standard for Low-Rate Wireless Networks--
283 Amendment 2: Low Power Wide Area Network (LPWAN) Extension to the Low-Energy
284 Critical Infrastructure Monitoring (LECIM) Physical Layer (PHY)
- 285 • 802.15.4z-2020 - IEEE Standard for Low-Rate Wireless Networks--Amendment 1:
286 Enhanced Ultra Wideband (UWB) Physical Layers (PHYs) and Associated Ranging
287 Techniques
- 288 • 802.15.6-802.15.6-2012 - IEEE Standard for Local and metropolitan area networks - Part
289 15.6: Wireless Body Area Networks
- 290 • 802.15.7-2018 - IEEE Standard for Local and metropolitan area networks--Part 15.7:
291 Short-Range Optical Wireless Communications
- 292 • 802.15.8-2017 - IEEE Standard for Wireless Medium Access Control (MAC) and
293 Physical Layer (PHY) Specifications for Peer Aware Communications (PAC)
- 294 • 802.15.9-2021 - IEEE Standard for Transport of Key Management Protocol (KMP)
295 Datagrams
- 296 • 802.15.10-802.15.10-2017 - IEEE Recommended Practice for Routing Packets in IEEE
297 802.15.4 Dynamically Changing Wireless Networks
- 298 • 802.15.10a-802.15.10a-2019 - IEEE Recommended Practice for Routing Packets in IEEE
299 802.15.4(TM) Dynamically Changing Wireless Networks - Amendment 1: Fully Defined
300 Use of Addressing and Route Information Currently in IEEE Std 802.15.10

301 5.6 IEEE 802.16: Broadband Wireless MANs

- 302 • 802.16-2017 - IEEE Standard for Air Interface for Broadband Wireless Access Systems
303

304 5.7 IEEE 802.19: Wireless Coexistence

- 305 • 802.19.1-2018 - IEEE Standard for Information technology--Telecommunications and
306 information exchange between systems--Local and metropolitan area networks--Specific
307 requirements--Part 19: Wireless Network Coexistence Methods
- 308 • 802.19.3-2021 - IEEE Recommended Practice for Local and Metropolitan Area
309 Networks--Part 19: Coexistence Methods for IEEE 802.11 and IEEE 802.15.4 Based
310 Systems Operating in the Sub-1 GHz Frequency Bands
311

312 5.8 IEEE 802.21: Media Independent Handover Services

- 313 • 802.21-802.21-2017 - IEEE Standard for Local and metropolitan area networks--Part 21:
314 Media Independent Services Framework

- 315 • 802.21-802.21-2017/Cor 1-2017 - IEEE Standard for Local and metropolitan area
316 networks--Part 21: Media Independent Services Framework--Corrigendum 1:
317 Clarification of Parameter Definition in Group Session Key Derivation
318 • 802.21.1-2017 - IEEE Standard for Local and metropolitan area networks--Part 21.1:
319 Media Independent Services

320 5.9 IEEE 802.22: Wireless Regional Area Networks

- 321 • 802.22-2019 - IEEE Standard - Information Technology-Telecommunications and
322 information exchange between systems-Wireless Regional Area Networks-Specific
323 requirements-Part 22: Cognitive Wireless RAN MAC and PHY specifications: Policies
324 and Procedures for Operation in the Bands that Allow Spectrum Sharing where the
325 Communications Devices May Opportunistically Operate in the Spectrum of Primary
326 Service
327 • 802.22.2-2012 - IEEE Recommended Practice for Information Technology -
328 Telecommunications and information exchange between systems Wireless Regional Area
329 Networks (WRAN) - Specific requirements - Part 22.2: Installation and Deployment of
330 IEEE 802.22 Systems
331 • 802.15.22.3-2020 - IEEE Standard for Spectrum Characterization and Occupancy
332 Sensing
333 TV White Space has not been widely adopted in North America because most of the “white
334 space” spectrum has been auctioned off for commercial cellular, leaving broadcast television
335 packed into the remaining channels. The use of CBRS has been adopted for small regional
336 networks, despite the downsides of much shorter range due to the higher frequency band.
337

338 6 Common network model for vertical application networks

339
340 A common foundation of the network architecture for a variety of vertical applications is
341 provided by the IEEE Std 802.1CF-2019 IEEE Recommended Practice for Network Reference
342 Model and Functional Description of IEEE 802 Access Network.
343 All communication networks providing the means to connect various communication endpoints
344 (terminals) to the same or different information servers over a shared infrastructure follow the
345 same architectural principles. IEEE 802 technologies well support the realization of an access
346 network, that establishes the shared infrastructure allowing to manage the connections of a wide
347 variety of terminals through wired or wireless interfaces to their communication peers, either
348 through bridging in the local area, or through routing by an access router in more widespread
349 networks.

350 6.1 Network Reference Model

351 Figure 1 below shows the mapping of the IEEE 802 Network Reference Model (NRM) to usual
352 communication network topologies. Core of the NRM is the Access Network that connects
353 terminally either directly through bridging or forwards traffic to the access router when the

354 communication peer is behind the same Layer 2 domain. Various control entities support the
 355 access network to provide secured and managed connectivity.
 356

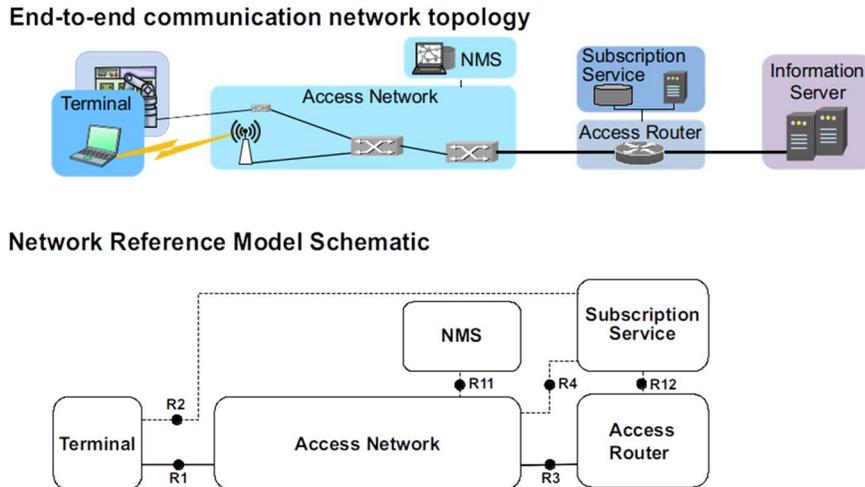


Figure 1: Network reference model design

357
 358
 359 NMS denotes the network management system that provides the functions to configure and to
 360 monitor the correct operation of the access network infrastructure. The subscription service is the
 361 control entity that deals with the communication demand of the individual terminals. It provides
 362 authentication to restrict the usage of the access network to only known terminals and provides
 363 to the access network the configuration parameters that each of the terminal expects for proper
 364 operation.
 365 Subscription Service is a general term that can mean any function from a traditional operator
 366 subscription service to a private network's authentication and device policy control function.
 367 Figure 2 below further details the network reference model through exposing the internal
 368 structure of the access network as well as the terminal and access router, and through the
 369 definition of reference points labeled R1 to R12 to denote control and user data interfaces of the
 370 access network. Solid lines indicate the path of the user data, while dotted lines indicate the flow
 371 of control information. The figure also shows an additional control entity called Coordination
 372 and Information Service, which is only needed when multiple access networks dynamically share
 373 the same communication resources, like in the case of dynamic spectrum management or
 374 dynamic resource sharing of virtual and virtualized access networks.

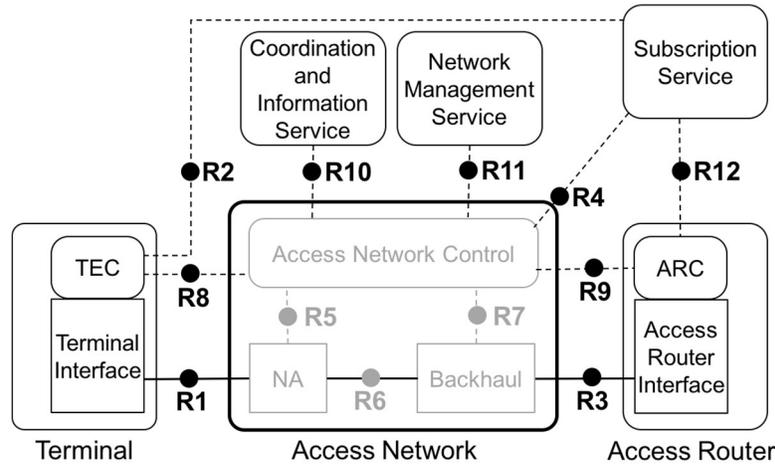


Figure 2: IEEE 802 Network Reference Model

375
 376 The IEEE 802 NRM is a conceptual model allowing many different implementations to leverage
 377 the same foundation and network functions, but it is not not intended as exact blueprint for the
 378 installation of a real network. Vertical applications have very specific networking requirements.
 379 To accommodate the variety of the requirements, the IEEE 802.1CF provides guidance and a
 380 common structure to build powerful networks out of the universal IEEE 802 technology building
 381 blocks.
 382 The applicability and flexibility of the approach is demonstrated in IEEE Std 802.1CF through
 383 the mapping of the NRM to a number of deployment scenarios from a simple WLAN router,
 384 home networks, simple and more complex enterprise networks, industrial networks, public
 385 WLAN hotspots to virtualized WLAN access networks for in-building IoT services and networks
 386 for fog computing.

387 6.2 Generic IEEE 802 access network functional behavior

388
 389 In addition to a common network reference model introduced above, the specification also
 390 provides generic functional description of the operation of an access network built through IEEE
 391 802 technologies. Figure 3 below shows the functional phases of an access network during a
 392 session of an IEEE 802 terminal. The session begins with the terminal searching for potential
 393 access to a network and ends with either terminal or network tearing down the connectivity.
 394

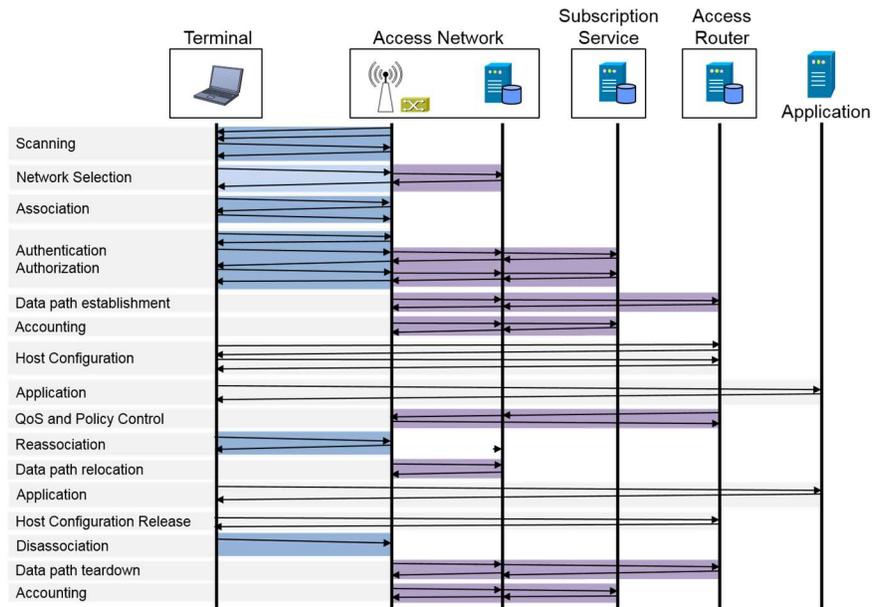


Figure 3: Lifecycle of a user session

395

396 There are many network functions invoked between the beginning and the end of a session, and
 397 the figure 3 above shows a typical example mainly aligned to the IEEE 802.11 air interface. The
 398 functional description provides a comprehensive reference of the management and control
 399 information conveyed over the reference points between the access network and external control
 400 and management entities. Such reference is not only helpful for educational purposes but also
 401 fosters commonalities in the design of the control gear of IEEE 802 access network and provides
 402 a development base towards virtualization of IEEE 802 access networks.

403 6.3 Network virtualization, instantiation, and slicing

404

405 While well-known models like VLANs in IEEE 802 or the network slicing solution of 3GPP
 406 provide several isolated user data planes in a common infrastructure, which can be either
 407 assigned to different services or to different tenants of the network, the network functional
 408 modeling provides the prerequisites for setting up multiple instances not only for the user data
 409 path, but also for all the control associated with a user data path. Separating not only the data
 410 paths of multiple tenants, but also all the control associated with a data path allows to address
 411 one of the main prerequisites of deployment of vertical application networks, the need for
 412 independent operational domains for each of the verticals. Virtualized IEEE 802 access networks
 413 behave exactly the same way as dedicated access networks but have the cost and scalability
 414 benefits of making use of a common infrastructure. It is the same approach that was taken
 415 through Virtual Machines (VMs) leading to the establishment of cloud computing.
 416 Figure 4 below sketches the concept of virtualization of IEEE 802 access network. Three
 417 instances are shown based on a common infrastructure, each with its own control entities and

418 interfaces towards terminals and application servers reachable through the access router. As
 419 infrastructure resources can be dynamically shared among the virtualized networks, the CIS acts
 420 as control entity managing the dynamic assignment of infrastructure resources.

421
 422 The virtualized access network example shown above is directing into potential network
 423 evolution beyond the current understanding of network slicing. However, the IEEE 802.1CF
 424 specification already provides the model and concepts of virtualized access networks, that can be
 425 fully build based on existing IEEE 802 protocol specifications. It is shown that realization of
 426 such powerful networking concepts with IEEE 802 technologies is a matter of implementation
 427 without the need for lengthy standardization activities. Just, let's do it.

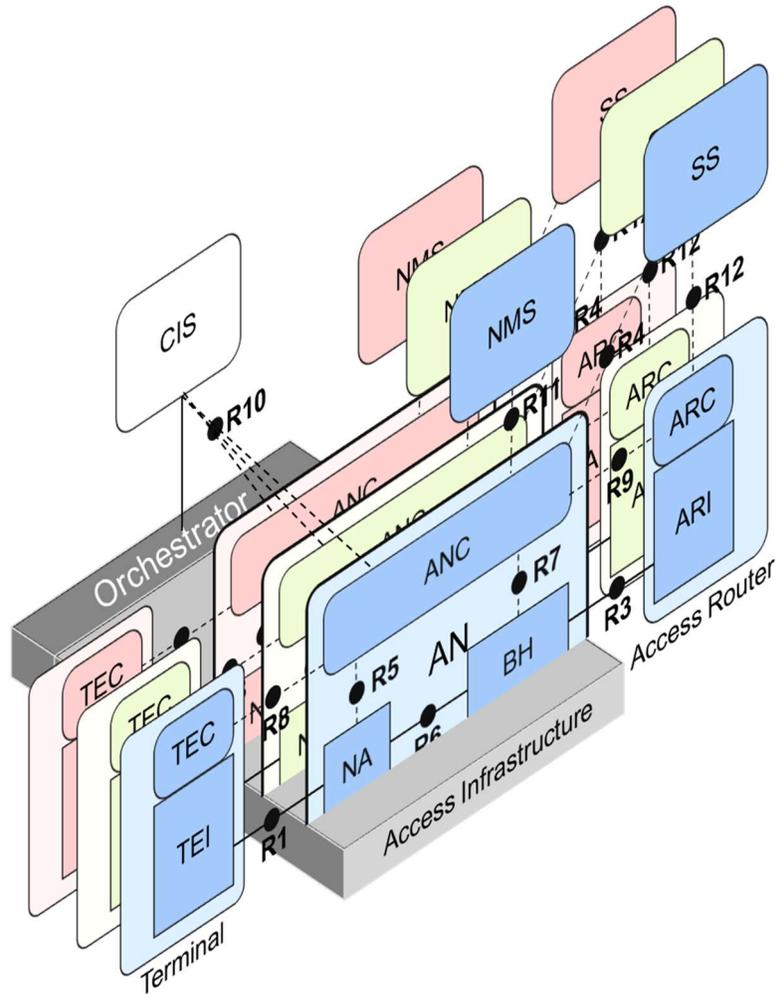


Figure 4: Multiple instances of virtualized IEEE 802 access network

428
 429
 430

431 **7 Higher layer functions and service design in vertical**
 432 **application networks**

433 IEEE 802 provides a high variety of wired and wireless solutions for the Physical and Link layer
 434 functions of communication links to serve a very wide range of requirements of applications.
 435 Each of the applications can choose out of the common IEEE 802 communication toolbox the
 436 features that fit best its particular needs without compromises or exaggerated complexities due to
 437 a common higher layer architecture.

438 Application specific protocol stacks for network layer, transport layer, and application layer
 439 functions have been mostly replaced through IP protocols in the past decades to leverage the
 440 huge benefits of the common IP protocol regarding flexibility, performance, availability, and
 441 cost. IEEE 802 technologies played a huge role in the transformation to IP protocols as the
 442 protocols and technologies provided excellent support for the transport of IP packets and they
 443 were able to cope with the growth of IP traffic through steady enhancements.

444 Therefore, usually the **Generic IP** protocol stack is used for realizing vertical applications,
 445 leveraging IPv4/IPv6 in the Network layer, TCP or UDP in the Transport layer, and well-known
 446 IP protocols like HTTP, CoAP, or MQTT in the Application layer.

447 However, the IEEE 802 technologies allow for more specific network solutions when special
 448 requirements or conditions arise. Legacy networking protocol stacks can be operated for
 449 transition and interoperability aside of IP protocol solutions on the same communication
 450 infrastructure. The figure below illustrates for a few examples the approaches to realize vertical
 451 application networks on top of IEEE 802 technologies.

452

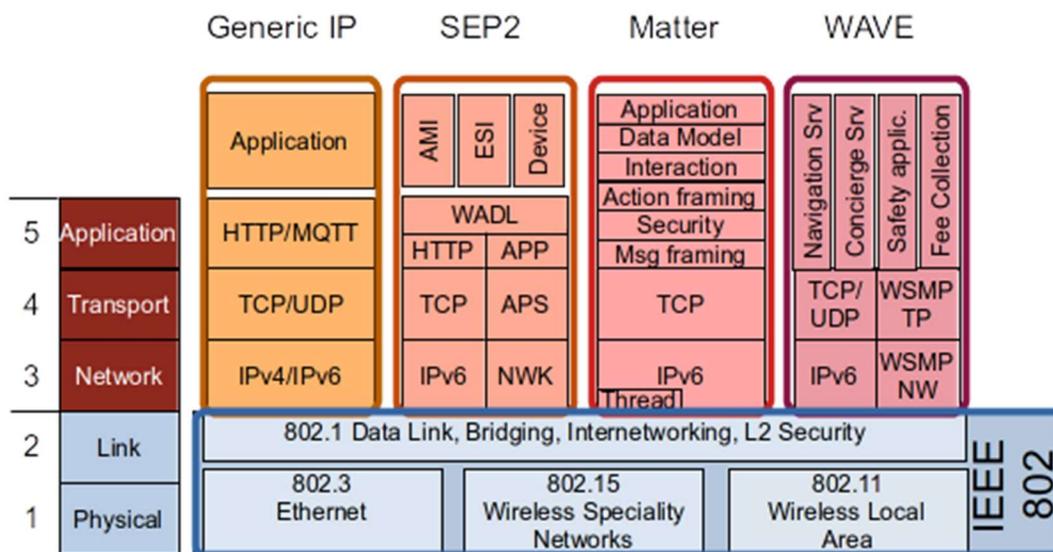


Figure 5: Examples of vertical applications based on IEEE 802 networking

453 Vertical application networks often not only deploy the IP based protocol suite but leverage more
 454 specialized transport solutions.
 455


456 The **Smart Energy Profile 2** (SEP 2) standard was initially specified by the ZigBee Alliance in
 457 conjunction with the HomePlug Alliance. It provides a RESTful messaging protocol for
 458 information and control for energy management in Home Area Networks for both wired and
 459 wireless networks. It can be applied on transport based on IETF IP protocols or other specialized
 460 transport protocols for particular link technologies like IEEE 802.15.4.

461 **Matter** is a smart-home connectivity standard that originated from the former Connected Home
 462 over IP (CHIP) project. It aims to provide interoperability among smart home devices and IoT
 463 platforms of different vendors and providers. Matter provides a multi-layer application protocol
 464 suite that is provided as open source for easy adoption. In addition to plain IP based connectivity
 465 over any kind of link technology it also supports Thread based connectivity over IEEE 802.15.4.

466 **WAVE** (Wireless Access in Vehicular Environments) is specified through IEEE 1609 leveraging
 467 IEEE 802.11 as wireless link technology. Various optimizations in the upper part of the Data
 468 Link layer and above were applied to cope with the particularities of a rapidly changing wireless
 469 environment. The IEEE 1609 series of specifications describes the architecture and services
 470 necessary for devices to communicate in a mobile vehicular environment. It follows the open
 471 system interconnect model and provides support for the Internet Protocol and its transport
 472 protocols. In addition, securing WAVE management messages and application messages is
 473 addressed as well as administrative functions necessary to support the core security functions.

474 **8 The building block/stone heap and the castle – why IEEE**
 475 **802 is somewhat different.**

476

	IEEE 802	Others e.g. 3GPP
	Open architecture	Defined architecture
		

8.1 General paradigms

Aim	Simplicity first	Perfect solutions
Approach	Divide and conquer	Strictly hierarchical
Goal	Common solutions	Extreme optimization

	IEEE 802	Others e.g. 3GPP
Purpose	Unifying layer for network of networks	Specifically defined network structure
Scalability	Very small to large	Higher entry burden but expandable to extremely large
Spectrum	unlicensed	licensed
Ownership	Anybody	Often bound to some authorization

8.2 Provisioning (Planning and installation)

Approach	Limited size local area network	Nationwide services network
Tools	Small set of functions	Comprehensive architecture
Objectives	Link layer connectivity	End2end service delivery
Applicability	Very small to large	Higher entry burden but expandable to extremely large
Standardization	Set of individual standards	Suite of related standards
Interoperability	Layered interoperability	Service interoperability
Execution	Easy entry	Comprehensive knowledge required

8.3 Administration

Approach	Self-configuration, often distributed	Centrally controlled
Tools	Use of simple security means	Complex security architecture
Objectives	Flat-fee services	SLAs and contracts
Applicability	More choices for customization and sophisticated use cases	Better suited to standard deployments
Standardization	Limited to L1 & L2; higher layers adopted from IETF	Complete suite of specifications partly leveraging IETF protocols
Interoperability	Basic tools provided, but finally relying on peer-to-peer agreements	Fully specified
Execution	Very scalable depends on operational needs	Only full scope according to specifications

	IEEE 802	Others e.g. 3GPP
8.4 <u>Operation</u>		
Approach	Usually over-provisioning used to avoid operational complexity and expenses	Dynamic re-adjustments of network resources to optimize operational cost
Tools	Simple means for verification of proper operation	Comprehensive monitoring
Objectives	Simplicity and automation	Full control and deep insights
Applicability	Keep bits flowing	Generate value
Standardization	Comprehensive standards for automation	Adjustable interfaces for operational excellence
Interoperability	Plug and play	Plug and configure
Execution	Switch it on and let it run	Operations center

8.5 Maintenance

Approach	Highly modular to allow for gradual replacements and enhancements	Introduce a next generation end-to-end network for the next level
Tools	Incremental enhancements	Complete replacements
Objectives	Foster and grow	Revolutionize the network
Applicability	Incremental adjustment of network capabilities	Harmonized infrastructure renewal
Standardization	Individual standards enhancements	Generational suites of standards
Interoperability	Forward and backward compatibility	Generational interworking
Execution	One piece at a time	Regular swap of complete infrastructure

8.6 Troubleshooting

Approach	It depends	Count and measure everything
Tools	Simple tools for detection and localization	Comprehensive network management suite
Objectives	Base functions for proprietary	Ensure detection of any

	IEEE 802	Others e.g. 3GPP
	solutions and common sense	malfunction and quick recovery
Applicability	Economic solutions adjusted to the needs of the use cases	Guaranteed availability of highly complex infrastructures
Standardization	Definition of managed attributes	Standardized attributes, architecture, and procedures
Interoperability	Enable basic commonality	Interoperable higher layer network management
Execution	Low barrier to entry for vertical asset owners	Unique skill-sets and workforce

477

478 **9 Conclusion**

479 The IEEE 802 family of standards provides a solid foundation of connectivity for any kind of
 480 vertical applications. The various IEEE 802 technologies are able to address the wide variety of
 481 requirements that result from deploying networks optimized for very specific purposes.
 482 Through modularity and interchangeability of functional building blocks, IEEE 802 networks are
 483 suited to easily scale from very small to very large infrastructures with modest to very
 484 demanding data transfer capacities fostering not only functional but also economic competition
 485 among different approaches. Nevertheless, the various solutions follow common architectures
 486 and a common network reference model to facilitate gradual improvements and to keep
 487 necessary learning curves for design, implementation, and operation relatively flat.
 488 Even when IEEE 802 standards are providing by far the primary transport technologies for IP
 489 based communication solutions, other network protocols, as often used for optimization or
 490 interoperability in vertical applications, are supported as well and can even run in parallel with IP
 491 on the same network infrastructure.

492

493

494 **References**

495

496

497

